

Energy-Aware Distributed Fence Surveillance for Wireless Sensor Networks

Norman Dziengel, Marco Ziegert, Stephan Adler, Zakaria Kasmi, Stefan Pfeiffer, Jochen Schiller

Department of Mathematics and Computer Science

Freie Universität Berlin, Takustr. 9, 14195 Berlin

{dziengel, ziegert, adler, kasmi, pfeiffer, schiller}@inf.fu-berlin.de

Abstract—Fences are used all over the world to protect areas against unauthorized access. While most fences meet these requirements by building a physical and psychological barrier against intruders, this is not sufficient for areas of particular interest like restricted areas of an airport or construction sites with expensive goods. To detect intruders we integrate wireless sensor nodes into a fence. We fulfill the requirements for real-world energy-awareness by using active sensors with configurable logic, power saving modes like WOR and power down modes. The sensor nodes are capable of differentiating between several events, with the appliance of a distributed classification algorithm. We present an energy-aware platform for a distributed fence surveillance system in a wireless sensor network. We report on our experience in creating a platform that is concerning energy and performance demands and specifically tailored for the purpose of fence surveillance including fully integrated housing.

I. INTRODUCTION

Burglary on security sensitive areas and construction sites with valuable equipment is assessed as a high economical loss. Therefore a flexible, easy installable, economical and high accurate surveillance system is necessary. A common solution to prevent theft and vandalism on construction sites or to protect valuable goods on airports is a fence. Typically a fence has two disadvantages: Firstly, it reveals the existence of something valuable or interesting and secondly, a fence is simply crossed with some sportsmanship or opened with cheap tools. Current fence surveillance systems still need additional cameras and watchmen to protect borders or entire areas which leads to high costs and complex technical infrastructures [1]. Embedded security systems that are based on distributed event detection with sensor nodes can help to improve and simplify fence surveillance installation in the future. Wireless communication brings the advantage of easy installation, but causes problems concerning energy consumption and power supply as well as limited bandwidth. Typical lifetime requirements for WSNs on e.g. construction sites, vary from some months up to several years, depending on the building project. Hence, we need to reduce the amount of energy by applying an intelligent event detection system that is able to perform an in-network evaluation of collected data. Further, an appropriate hardware platform is required that supports numerous energy-saving techniques like Wake-On-Radio (WOR) and suitable power down modes supported by the microcontroller unit (MCU). For

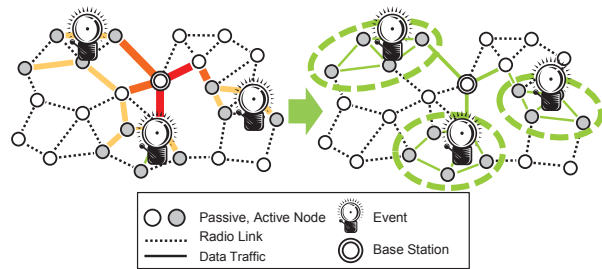


Fig. 1. Left: centralized data evaluation, Right: decentralized data evaluation

an energy-aware surveillance system, all mentioned methods need to be applied to reach the highest lifetime possible. Finally, the whole sensor node needs to be integrated into a fence to provide highest protection to the node itself.

We propose a new embedded system with specialized hardware in a full housing that integrates the energy source for a lifespan of more than half a year. The system includes our distributed algorithm for high accuracy event detection, based on distributed versions of classical pattern recognition approaches [2] with an a priori and supervised training. To save energy, we suggest to switch from a centralized to a decentralized data evaluation as depicted in Fig. 1. In the left part of Fig. 1, a traditional Wireless Sensor Network (WSN)[3] uses sensor nodes as data collectors and sends all raw data to the base station (sink). Each node that is used to forward packets towards the sink suffers from the energy costs of additional radio traffic. Nodes that provide the last hop to the sink are frequently used to transmit data to the sink which leads to early failures of these nodes. In the right part of Fig. 1, all calculations are done on nodes and only a reduced feature vector is propagated within the network. Finally, a resulting and relevant event may be propagated through the network to the sink which reduces the original data stream to a single byte which reduces the energy-consumption on multi-hop routes. In [4] we presented a feature-based distributed event detection system that assembles and evaluates a combined feature vector within the network to distinguish between multiple events. Based on the distributed event detection, we introduce an energy-aware hard- and software architecture that allows to deploy real-world applications with high life time. This paper

contributes to the field of energy-aware distributed fence surveillance for WSNs as follows:

- An energy-aware hard- and adjusted software platform.
- The integration of an distributed event detection and a fully realized housing.
- Several engineering problems that are often overlooked in testbed deployments are solved.

The remainder of the paper is organized as follows: Section II presents comparable event detection systems. Section III discusses a newly designed sensor node with housing, a multiple base node approach and the distributed event detection system. The energy-awareness achieved by hard- and software adjustments is discussed in Section IV. Experiments and results are covered in Section V. Section VI evaluates the energy consumption and the communication response time of our event surveillance system. Finally, Section VII concludes the paper and gives a short outlook to the future work.

II. RELATED WORK

Current approaches to integrate event detection in WSNs typically apply a threshold detection, like the fence surveillance system introduced by Kim et al. [1] which does not classify any events. The system is equipped with ground and fence nodes to detect intruders. Combined with a network camera to focus on the intruder, an unmanned ground and air vehicle extend the communication and interaction of the system. The scenario does not cover events that occur in a time-period smaller than 20 seconds, a duty cycle period of 30 seconds is introduced with 10 seconds for sensing and 20 seconds for sleep. With this duty cycle period and the assumption of a maximum available electrical charge of 19 Ah, they calculate a lifespan of approximately 70 days for the ground and the fence nodes.

In [5] Yousefi et al. evaluate an event detection system with one sensor that is attached in the middle of the fence. They evaluate two different kinds of events (rattling and climbing) that have been exposed to one fence element with a detection rate of 90%. They used a 3D-acceleration sensor for data gathering and event detection. The involved classifier is a Bayesian classifier with an underlying state machine. They extract resonance frequency based features. They are neither introducing a distributed system nor do they disclose the used hardware in detail.

In [6], Genet[©] offers a fence monitoring system TEDASTM for military applications. No detailed description of the algorithms are given. All nodes are supplied with a 12 Volt DC wire, and the sink nodes with a 220 Volt AC wire. They make use of a 2.4 GHz transceiver with 16 Channels, and a 3D accelerometer with a sensitivity of $\pm 2 g$.

In [7] Wang et al. give an overview of current energy aware wireless sensor networks with the goal of collecting data and to maximize lifetime in parallel. They state that the typical centralized and unbalanced traffic pattern (see Fig. 1) needs to be solved. Typical duty-cycle-based approach collect data in rounds or try to distribute needed communication over the network. As a disadvantage the resolution of collected data

may be reduced and latency raised. We suppose that collecting a huge amount of data without running into energy balancing problems is solvable by using in-networking capabilities like pattern-recognition and collaborative event evaluation that prevent the system from sending raw-data through the whole network to a sink.

Our prior work in [8] and [4] provides a distributed event detection system and reaches a high average detection accuracy of about 87%. Further on, it taught us lessons on how to design a sensor node for the special needs of a fence surveillance system and how integrate it within a fence.

III. AVS-EXTREM EVENT DETECTION SYSTEM

The goal of fence monitoring is to distinguish between numerous events like opening the fence, kicking against the fence or climbing over the fence and therefore to prevent the protected area from unauthorized access. In order to monitor these events we place sensor nodes within the fence and additionally on valuable tools like air hammers and vehicles. Each attempted break-in is recognized by several sensors and collaboratively evaluated by the detection system. The whole system is divided into two layers, the system and the application layer, see Fig. 2. It covers all sub sequentiality mentioned requirements.

A. Architectural Overview

The system layer contains the AVS-Extrem Sensor Board, the operating system and the energy management. The AVS-Extrem Sensor Board is an ARM7 based wireless sensor node which is designed to fit into typical construction site fence elements and will be introduced in Section III-B1. A low power acceleration sensor is needed to gather data of any fence movement and is evaluated in [8], where the SMB380 Bosch sensor is suggested as a suitable 3D acceleration sensor for the fence monitoring application. A specialized and waterproof housing has been developed to protect the hardware from environmental influences, see Section III-B2.

A flexible energy management that supports WOR and numerous MCU dependent energy saving techniques is required. The energy supply has to last for a period longer than three months of use, to meet the minimum requirements of a short term installation. The energy management is described in Section IV-A and Section IV-B. To guarantee a low response time and high precision during the event detection, a thread based real time operating system (RTOS) is needed. We use the FireKernel RTOS [9] which features threading and a priority based preemptive multitasking. For completely secured communications, we implemented a security layer that proposes a symmetric cipher-algorithm in CBC-Mode [10] to provide confidentiality, authenticity and integrity, see [11]. The Micro-Mesh-Routing (MMR) protocol is initially introduced in [12] and briefly described in Section III-C. We extend MMR by a virtual sink to support multiple base nodes. This enhances our WSN with a handy scalability that depends on the number of base nodes. Additional nodes can be added with minimal effort to extend the dimension of the network.

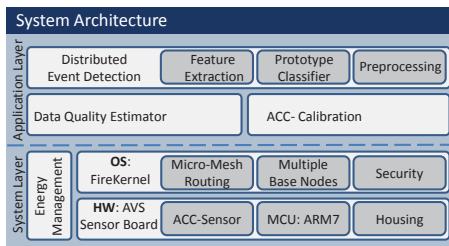


Fig. 2. System architecture

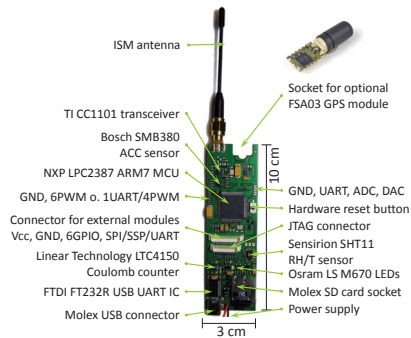


Fig. 3. AVS-Extrem Sensor Node

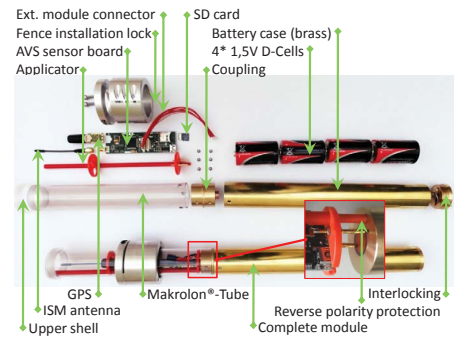


Fig. 4. AVS-Extrem housing

The application layer contains an optional Dempster-Shafer based data quality estimator [13]. The data quality estimator is able to assess incoming values by heuristics. A data quality estimation allows subsequently to decide whether the reliability of a measurement is high or low. The data aggregation can be performed depending on the data quality. The acceleration sensor is automatically calibrated before and after each event. We developed our own application dependent calibration routine that takes into account noise and interruptions during the calibration period. The system also contains the mandatory distributed event detection system that is described in Section III-D, while further details can be found in [4].

B. Hardware

The AVS-Extrem sensor node is based on the MSB-A2 platform [14] developed at the *Freie Universität Berlin*. As the MSB-A2, the AVS-Extrem sensor node is equipped with an LPC2387 microcontroller [15] and uses the CC1101 transceiver [16]. The microcontroller is based on an ARM7 core, operating at 72 MHz. The CC1101 is driven by a 26 MHz clock and uses the 868 MHz SRD radio band. Because of our requirement of a revised blank shape and additional peripheral devices, we designed a new sensor board.

1) *AVS-Extrem Sensor Node:* For the AVS-Extrem project a new printed circuit board (PCB) had to be designed due to the fact that an accelerometer is required for our application and the form factor of the PCB had to be adjusted to fit into the proposed housing, (Fig. 3). The core of the new design is identical to the MSB-A2, but new peripheral parts were added.

The 3D-accelerometer SMB380 [17] is applied because of its supplementary features. The sensor offers a high sampling rate of up to 1500 Hz and a maximum range of 8 g which is necessary to cover high acceleration shocks. The autarkic acceleration sensor logic (ACC-Logic) is able to detect the event beginning using the threshold value register. During the event detection the ARM7 MCU is in power down mode (PD). The threshold settings are determined during kernel start-up and after each event. We involve environmental parameters like wind, fence position and manufacturing tolerances of internal converters that may cause ripple. [8]. During experiments, the node specific and dynamic gathered thresholds reached a maximum of 0.2 g.

To provide a gapless event recognition that initiates the succeeding event evaluation, the acceleration sensor is continuously active and consumes $200 \mu\text{A}$ at 3.3 V. In addition to the core components explained above, the PCB also uses the temperature/humidity sensor SHT11, to monitor environmental parameters as well as a SD Card slot to store prototype data. The LTC4150 coulomb counter is used to monitor the state of the batteries. Further peripheral interfaces depicted in Fig. 3 are used for development purposes.

2) *Sensor Node Housing:* Our aim is to integrate as much of the sensor node as possible into the vertical rod of a zincked steel fence, because the fence itself already offers a high grade of robustness, see Fig. 5. In contrast to this benefit, the antenna has to stay outside the fence as the vertical rod affects wireless communication like a Faraday cage. The housing enables to arrange experiments with comparable settings as the sensor nodes can be mounted in a highly repeatable, very stable and fixed way within the fence.

To deploy the sensor node into the fence, we have to solve several engineering problems that are typically ignored in testbed deployments because of the difficulty to simulate the exact behaviour (Fig. 4). These problems are a long-time battery supply as well as robustness to the impact several weather conditions and a rugged housing which meets the requirements of a construction site installation.

We decided to use standard D-Cells to provide a flexible design and to deliver a more stable capacity even at low temperatures. We further decided to choose a brass battery case for solidity and conductivity for the ground connection. A brass coupling connects the sensor node with the battery case while a thin rigid PVC isolated copper core connects the positive pole. To provide undisturbed radio communication and to assure resistance to a wide range of weather conditions, we package the sensor node within a Makrolon® tube. The red Makrolon® applicator (see Fig. 4) holds the sensor node in correct position, is plugged into the coupling and employs standard banana plugs. A reverse polarity protector allows only one correct contact termination. The battery case is shuttered with a screw cap which is actuated by a spring. In rare cases a vertical shock is able to compress the spring which disconnects the battery. This problem is solved by an additional capacitor to bypass a temporary interrupt to the power supply. To affix



Fig. 5. Experiment at the fence & integration of sensor node into vertical fence rod

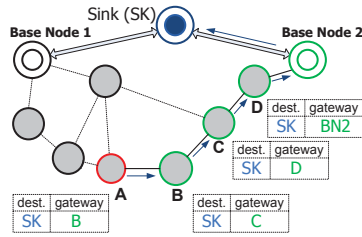


Fig. 6. Data transmission over base nodes to sink by using MMR

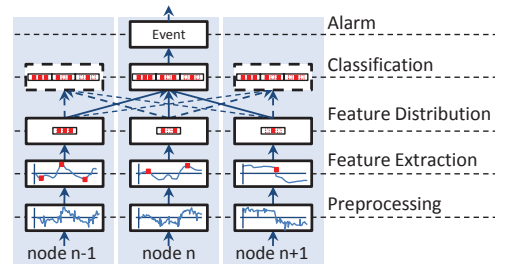


Fig. 7. Distributed Event Detection: Data flow from event to alarm

the sensor node in the fence a two part installation lock is used to fix the node at the lock and the lock at the fence.

C. Networking – Multiple Base Nodes

Multiple base nodes are adopted in order to provide fault-tolerant connections between an arbitrary node in the WSN and the virtual sink. Fig. 6 illustrates a configuration of a network with two base nodes. Base nodes act as proxies between the sensor nodes and the sink. The sink is connected to multiple base stations via a wireless or wired connection. In case of failure or non-reachability of a base node, an alternative base node is automatically discovered by the Micro-Mesh-Routing Protocol (MMR) [12]. Thus, the reliability of the network and the accessibility of the sink will be improved. The Micro-Mesh-Routing Protocol as a reactive and dynamic routing protocol selects a robust path to the sink. MMR combines different approaches and features of divers routing protocols like AODV (Ad hoc On-Demand Vector) to use hop-by-hop routing during the data transmission, while the principle of DSR (Dynamic Source Routing) is used to collect partial route information in the course of the route discovery phase. MMR attempts to set up a route between two neighbors. In contrast to a strict reactive protocol, the intermediate nodes analyze all forwarded packets, to update their routing tables. Sequence numbers are used to prevent loops, to avoid duplicates and to determine the freshness of a route. MMR handles changes in the WSN topology by automatically discovering new routes to the base nodes. The discovery operation uses two message types *Route Request* (RREQ) and *Route Reply* (RREP). The base nodes handle all RREQ messages destined to the sink by generating a RREP message, hence, each base node virtually represents the sink. After route discovery, the data transfer can be started, where the intermediate nodes forward the packet to one of the base nodes according to the routing table entries. Finally, the base node delivers the message to the sink, see Fig. 6.

D. Distributed Event Detection

The event detection system consists of two modules: *training* and *recognition*. Both modules perform a collection of raw data during an event, preprocessing, feature extraction, feature distribution and a final classification which may raise an alarm in the recognition module, see Fig. 7.

1) *Training*: During the a priori and supervised training all events have to be trained at the fence where the events need to be performed as exemplary depicted in Fig. 5. The measured raw data is preprocessed with filter functions to smoothen the incoming values. During preprocessing, the system additionally segments the event by hysteresis functions to detect the beginning and the end of events. Depending on the application and the used features it is subsequently possible to normalize the data by value and/or by time. During the feature extraction, the nodes calculate all available features for each trained class and send the features in a combined feature vector to the sink. The feature generation reduces the dimensionality of the data stream but keeps the characteristics of varying events. The Leave-one-out Cross Validation (LOOCV) [18] is applied on all collected features to assess feature combinations. The assessment is done by the Euclidean-based prototype classifier.

The selected features are combined in a new reference feature vector for each class: called *prototype*. The variance in the raw data during training is used to define a radius around each prototype, the classification region. Events classified within this region are assessed as valid. The training is finished after distributing the prototypes to all sensor nodes.

2) *Event Detection*: If an event arises at the fence the affected nodes start to collect raw data, similar to the training. First of all, the raw data is preprocessed and in contrast to the training only the selected features, defined by the prototypes, are extracted. During feature distribution, all features are send via broadcast to the 1-hop neighborhood. Nodes affected by the event fuse the received features to a complete but initially unclassified feature vector. The nodes then run the euclidean based prototype classification. If a node classifies an event successfully, the event may raise an alarm. As in [4] suggested, only one small alarm packet has to be send to the sink in.

IV. ENERGY-AWARENESS

A. Hardware

The main goal of our new hardware platform – next to meeting size limitations, offering sufficient performance and providing required resources – is a long runtime between maintenance intervals to increase usability. We meet these requirements by choosing components that match to the expected duty cycle of most WSNs: Long term inactivity, short term processing and communication. Optimizing this period

of inactivity obtains higher energy saving and increases the lifespan many times. Nevertheless, our primary requirement is a continuous monitoring of events. We fulfill this requirement by a configurable 3D-acceleration sensor that is able to activate the MCU for further acceleration data processing after an event occurred. During surveillance, the system has a total power consumption of 9.0 mW and about 0.7 mW are attributed to the acceleration sensor. The remaining power consumption is composed by the ARM7 power down mode, temperature/humidity sensor, transceiver WOR-mode and unavoidable transformation loss. In contrast, event detection without ACC-Logic would require at least 206.25 mW.

B. Software

The FireKernel [9] implements a generic support for power savings. It enters power down mode whenever threads do not demand processing time and no peripherals are operating that will be affected by power down mode. Peripherals are always affected whenever their operation is dependent on clock signals generated indirectly by the Phase-Locked-Loop. The device driver needs to prevent FireKernel from accessing the MCU power down mode in these cases. Nevertheless, the MCU can be halted by using IDLE mode.

If no fine-grained timers are required but a rough time control is sufficient, the application can use Real Time Clock (RTC) alerts with a one sec resolution. The MCU can be reactivated by the RTC alert which enables that all other clocks can be halted during idle time. The external RTC 32 kHz clock will not be affected by this power down mode and continues to operate normally and alerts the MCU just in time.

V. EXPERIMENTS & RESULTS

Our experiments show a whole life cycle of a sensor node during distributed event detection and recognition. To measure the energy consumption of the whole board as accurately as possible we soldered a $10\ \Omega$ shunt resistor into the supply line which is powered by a reference voltage of 5 V. To measure the voltage of the shunt resistor a digital sampling oscilloscope (DSO) is attached. As the resistor and the voltage are known, we can calculate the value of the current and use it to calculate the electric power used by the sensor node over the time of one DSO sample. By integrating the electric power over the time of one system state, like packet transmission or IDLE mode, we can exactly measure the energy used per state and use this information to approximate the energy consumption of the whole system over a certain time.

During the event detection phase, the sensor nodes use the MCU power down mode (PD), that also shuts down all internal peripherals. The wireless transceiver uses the WOR mode and is able to process incoming data. The acceleration sensor is active and monitors the fence elements movement. Fig. 10 demonstrates the relation between different energy-aware techniques that can be utilized with our hardware. An energy diagram of all phases of an event is depicted in Fig. 8.

During PD, a mean energy consumption of 9.0 mW is ascertained. During an event, the MCU is periodically utilized

to fetch acceleration data from the acceleration sensor to the MCU (206.25 mW). This is followed by the feature extraction (350 mW), and classification (58.80 mW on average). As described in [4], a maximum of seven sensor nodes are involved into a fence event. Hence, in the phase of feature distribution one broadcast packet is send (373.33 mW) and during classification six packets are received (178.5 mW) from the neighborhood. Finally the result is calculated and sent to the sink. Afterwards the sensor node is re-calibrated or if the hysteresis function has converged, the sensor node immediately returns to the detection mode. The average time duration of an event is about 10 s, including sampling, feature extraction, distribution and classification is 129.8 mW.

To evaluate radio communication latency we deployed 28 AVS-Extrem sensor nodes indoors (in the university building) and outdoors. We measured the latency for up to three hops and compare WOR with CRX. Latency is here defined as the roundtrip time of a full-sized data-packet.

Fig. 9 shows the results of the latency experiment in multiple settings. The CRX results represent the latency values with the transceiver in constant RX mode. In CRX mode we assume that the transceiver causes no delay. During WOR we expect higher latencies because of a duty cycle of 0,0018% (542 ms sleep period, 1 ms awake period). For WOR mode, we reach a median indoor latency of 633, 1141, 1611 ms and outdoor latency 766, 1313, 1893 ms for 1 to 3-Hop routes. CRX-environments reach 62, 192, 324 ms respectively.

VI. EVALUATION

Due to energy-aware techniques (EAT), we are able to reduce the mean power consumption from 456 mW to 9 mW, see Fig. 10. To evaluate energy consumption in a real-world scenario we assume 5 events per hour with a sampling duration of 10 s each. In our setup, we send 3 unicast status packets per hour to the sink. As construction site fences are rearranged infrequently, the routes are assumed as stable. The distributed event detection requires an additional power of 4 mW, while it requires additional 197 mW if the ACC-Logic is not active.

Hence, we measured a mean power consumption of 13.0 mW in the detection scenario. Four standard D-Cells are capable of 90 Wh resulting in a lifetime of about 280 days, as depicted in Fig. 10. This outperforms the fence surveillance system of Kim et al. [1] by four times, while they assume that no event will occur. Even in case of CRX or very high frequency of events, our system will survive of at least one week which serves short term installations, see first column (No EA) in Fig. 10.

Placing the initial detection of an event into the sensing hardware by applying the previous mentioned ACC-Logic, we gain energy savings in an order of 15 times compared to a software detection (no ACC-Logic), see Fig. 10. This high impact emphasizes the importance of a MCU independent sensor. The ACC-Logic decreases MCU processing time and enables the full capabilities of energy saving modes.

WOR latency in Fig. 9 can be verified by summing up the following values: As we use a WOR sleep period of 542 ms we

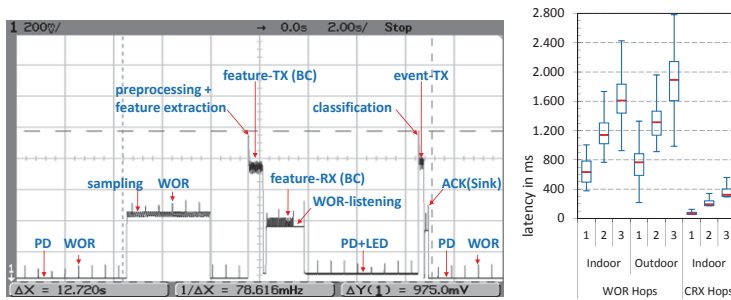


Fig. 8. Energy diagram for event processing

Fig. 9. WOR- and CRX-Latency

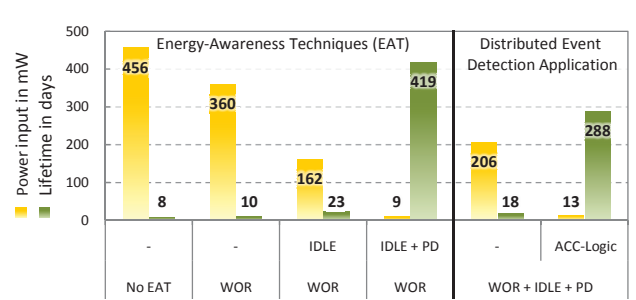


Fig. 10. Energy consumption and lifetime

expect a delay of about 280 ms per transmission. Hence, as we measure the latency by using a roundtrip packet we assume about 560 ms per hop. In addition a random CRX-backoff, discussed in [12] and internal computation time occurs, which can be approximated from the CRX 1-hop time of about 60 – 100 ms. The results show an expected latency of 633 – 766 ms for a 1-hop WOR echo transmission up to 1611 – 1893 ms for a 3-hop WOR echo transmission. The outdoor scenario results in higher latencies due a higher inter node distance compared to the indoor scenario. The outliers of the measurement can be explained by packet loss effects caused by bad link quality. Each additional hop adds approximately 100 ms delay to the transmission for CRX and 500 ms for WOR.

VII. CONCLUSION & FUTURE WORK

We presented a comprehensive system for fence surveillance with wireless sensor networks. Real-world requirements like energy-awareness have been covered by tailored hardware and adjusted software, while scalability is reached through the introduction of multiple base nodes. Further we obtain a ubiquitous integration of the modular sensor node with its power supply and housing into a fence. To outreach these results we developed a robust and weather-proof housing that contains a replaceable power supply for expeditious sensor node deployment and maintenance. Our expected lifetime of more than 280 days outperforms the current state of the art by four times. Next to our extended support of power saving functions in hardware and software, lifetime could be extended thanks to the energy-awareness of WOR which has been utilized in our system. The expense of increased latency caused by WOR, is acceptable and fulfills the requirements in our scenario to provide a responsive distributed fence surveillance system. The in-network classification optimizes the traffic load while holding on a high detection accuracy. For the future we will research on energy harvesting components that will benefit from the given energy-awareness. New areas of application like bridge surveillance with a long life monitoring or ubiquitous devices to support athletes and people with reduced mobility during rehabilitation will be evaluated. The impact of data quality assessment on event detection accuracy and energy-awareness will be investigated in the future to enhance data aggregation impact.

ACKNOWLEDGMENT

This work was funded in part by the German Federal Ministry of Education and Research (BMBF, AVS-Extrem).

REFERENCES

- [1] Y. Kim, J. Kang, D. Kim, E. Kim, P. Chong, and S. Seo, "Design of a fence surveillance system based on wireless sensor networks," in *Autonomics*, A. Manzalini, Ed., 2008, p. 4.
- [2] R. O. Duda, P. E. Hart, and D. G. Stork, "Pattern Classification (2nd Edition)," 2000.
- [3] I. F. Akyildiz and M. C. Vuran, *Factors Influencing WSN Design*. John Wiley and Sons, Ltd, 2010.
- [4] G. Wittenburg, N. Dziengel, C. Wartenburger, and J. Schiller, "A System for Distributed Event Detection in Wireless Sensor Networks," in *Proc. of 9th ACM/IEEE Intl. Conf. on IPSN*, Stockholm, Sweden, 2010.
- [5] A. Yousefi, S. Member, A. Dibazar, and T. Berger, "Intelligent fence intrusion detection system: detection of intentional fence breaching and recognition of fence climbing," in *Technologies for Homeland Security, 2008 IEEE Conference on*, 2008, pp. 620 –625.
- [6] *TEDAS™. Sensor Network System for Perimeter Security*, Genet©, ISTANBUL /TURKEY.
- [7] F. Wang, J. Liu, and L. Sun, "Ambient Data Collection with Wireless Sensor Networks," *EURASIP J. Wirel. Commun. Netw.*, vol. 2010, pp. 4:1–4:10, February 2010.
- [8] N. Dziengel, M. Ziegert, Z. Kasmi, F. Hermans, S. Adler, G. Wittenburg, and J. Schiller, "A Platform for Distributed Event Detection in Wireless Sensor Networks," in *Proc. of the 1st Intl. Workshop on Networks of Cooperating Objects (CONET '10)*, Stockholm, Sweden, 2010.
- [9] H. Will, K. Schleiser, and J. Schiller, "A real-time kernel for wireless sensor networks employed in rescue scenarios," in *Proc. of the 34th IEEE Conference on Local Computer Networks (LCN)*, New York, Piscataway, USA, 2009, pp. 834–841.
- [10] "NIST, National Institute of Standards and Technology, DES Modes of operation." [FIPS 81], 1980.
- [11] N. Dziengel, N. Schmittberger, J. Schiller, and M. Guenes, "Secure Communications in Event-Driven Wireless Sensor Networks." in *Proc. of the 3rd Int. Symp. on Sensor Networks and Applications SNA*, 2011.
- [12] T. Hillebrandt, "Untersuchung und Simulation des Zeit- und Energieverhaltens eines MSB430-H Sensornetzwerkes," Master's thesis, Freie Universität Berlin, 2007.
- [13] F. Hermans, N. Dziengel, and J. H. Schiller, "Quality estimation based data fusion in wireless sensor networks." in *MASS. IEEE*, 2009.
- [14] M. Baar, H. Will, B. Blywis, T. Hillebrandt, A. Liers, G. Wittenburg, and J. Schiller, "The ScatterWeb MSB-A2 Platform for Wireless Sensor Networks," Freie Universität Berlin, Berlin, Germany, Tech. Rep., 2008.
- [15] "LPC2387 datasheet," NXP, Eindhoven, Netherlands. [Online]. Available: "http://www.nxp.com/documents/datasheet/LPC2387.pdf"
- [16] "CC1101 datasheet," Texas Instruments, Texas, USA. [Online]. Available: "http://focus.ti.com/lit/ds/swrs061f/swrs061f.pdf"
- [17] "SMB380 datasheet," Bosch, Reutlingen, Germany. [Online]. Available: "http://www.bosch.de/start/content/language2/downloads/news_0505_1_Sensortec_Datasheet_en.pdf"
- [18] R. Kohavi, "A Study of Cross-Validation and Bootstrap for Accuracy Estimation and Model Selection," in *Proc. of the 14th int. joint conf. on Artificial intelligence - Volume 2*. San Francisco, CA, USA: Morgan Kaufmann Publishers Inc., 1995.