

Computability and Complexity Theory

Computability and complexity

- *Computability theory*
 - What problems can be solved on a computer ?
 - What is a computable function ?
 - Decidable vs. undecidable problems
- *Complexity theory*
 - How much time and memory is needed to solve a problem ?
 - Tractable vs. intractable problems


What is a computable function ?

- Non-trivial question \rightsquigarrow various formalizations, e.g.
 - General recursive functions *Gödel/Herbrand/Kleene 1936*
 - λ -calculus *Church 1936*
 - μ -recursive functions *Gödel/Kleene 1936*
 - Turing machines *Turing 1936*
 - Post systems *Post 1943*
 - Markov algorithms *Markov 1951*
 - Unlimited register machines *Shepherdson-Sturgis 1963*
 - ...
- All these approaches have turned out to be equivalent.

Church-Turing thesis

The class of intuitively computable functions is equal to the class of Turing computable functions.

Turing machine

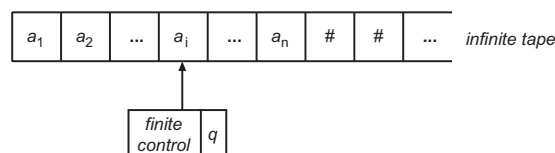

Depending on the symbol scanned and the state of the control, in each step the machine

- changes state,
- prints a symbol on the cell scanned, replacing what is written there,
- moves the head left or right one cell.

Formal definition

- $M = (Q, \Sigma, \Gamma, \delta, q_0, \#, F)$
- Q is the finite set of *states*.
- Γ is the finite alphabet of allowable *tape symbols*.
- $\# \in \Gamma$ is the *blank*.
- $\Sigma \subset \Gamma \setminus \{\#\}$ is the set of *input symbols*.
- $\delta : Q \times \Gamma \rightarrow Q \times \Gamma \times \{L, R\}$ is the *next move function* (possibly undefined for some arguments)
- $q_0 \in Q$ is the *start state*.
- $F \subseteq Q$ is the set of *final (accepting) states*.

Recognizing languages

- *Instantaneous description*: $\alpha_l q \alpha_r$, where
 - q is the current state,
 - $\alpha_l \alpha_r \in \Gamma^*$ is the string on the tape up to the rightmost nonblank symbol,
 - the head is scanning the leftmost symbol of α_r .
- *Move*: $\alpha_l q \alpha_r \vdash \alpha'_l q' \alpha'_r$, by one step of the machine.
- *Language accepted*

$$L(M) = \{w \in \Sigma^* \mid q_0 w \vdash^* \alpha_l q \alpha_r, \text{ for some } q \in F \text{ and } \alpha_l, \alpha_r \in \Gamma^*\}$$

- M may not halt, if w is not accepted.

Example

- *Turing machine*

$$M = (\{q_0, \dots, q_4\}, \{0, 1\}, \{0, 1, X, Y, \#\}, \delta, q_0, \#, \{q_4\})$$

accepting the language $L = \{0^n 1^n \mid n \geq 1\}$

δ	0	1	X	Y	#
q_0	(q_1, X, R)	–	–	(q_3, Y, R)	–
q_1	$(q_1, 0, R)$	(q_2, Y, L)	–	(q_1, Y, R)	–
q_2	$(q_2, 0, L)$	–	(q_0, X, R)	(q_2, Y, L)	–
q_3	–	–	–	(q_3, Y, R)	$(q_4, \#, R)$
q_4	–	–	–	–	–

- *Example computation*

$$\begin{array}{l}
 q_0 0011 \vdash Xq_1 011 \vdash X0q_1 11 \vdash Xq_2 0Y1 \vdash \\
 q_2 X0Y1 \vdash Xq_0 Y1 \vdash XXq_1 Y1 \vdash XXYq_1 1 \vdash \\
 XXq_2 YY \vdash Xq_2 XYY \vdash XXq_0 YY \vdash XXYq_3 Y \vdash \\
 XXYq_3 \vdash XXYq_3 \#q_4
 \end{array}$$